

CORSA-e

Rally Design-Kit



Do you search for an installer or have any questions?




SIGNAL Design GmbH | info@signal-design.de | +49-791 97 47 47-11

CORSA-e

Rally Design-Kit




The wrap is supposed to be installed by an installer. All yellow stripes should be applied with assembly fluid. The numbers marked with the *S are produced to fit the sportsversion GS line. Front and rear bumper differ from the normal version. All reference points must be removed after you are finished.

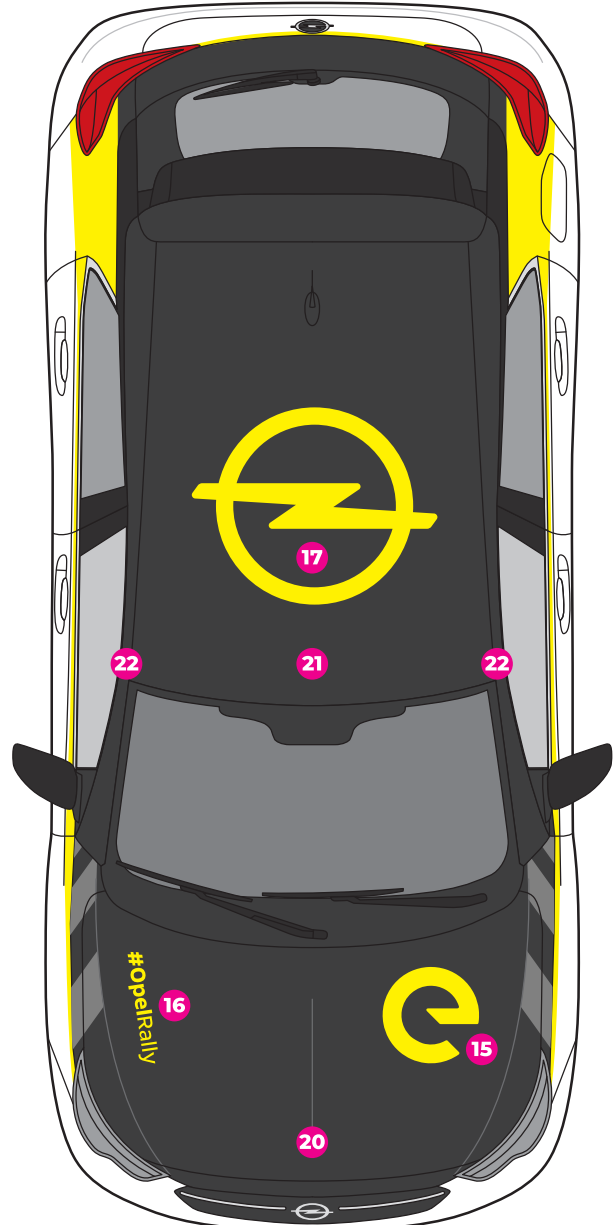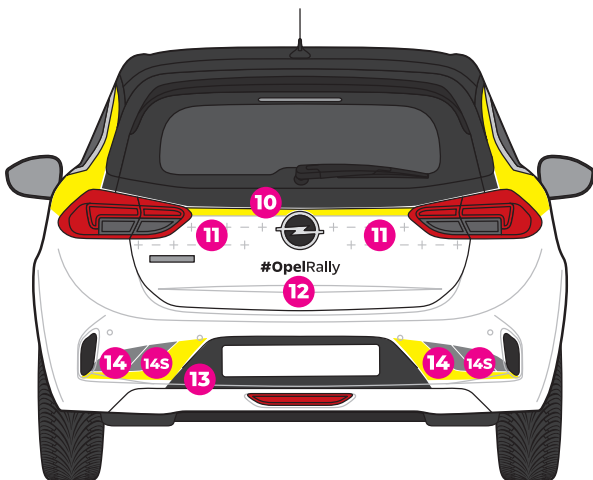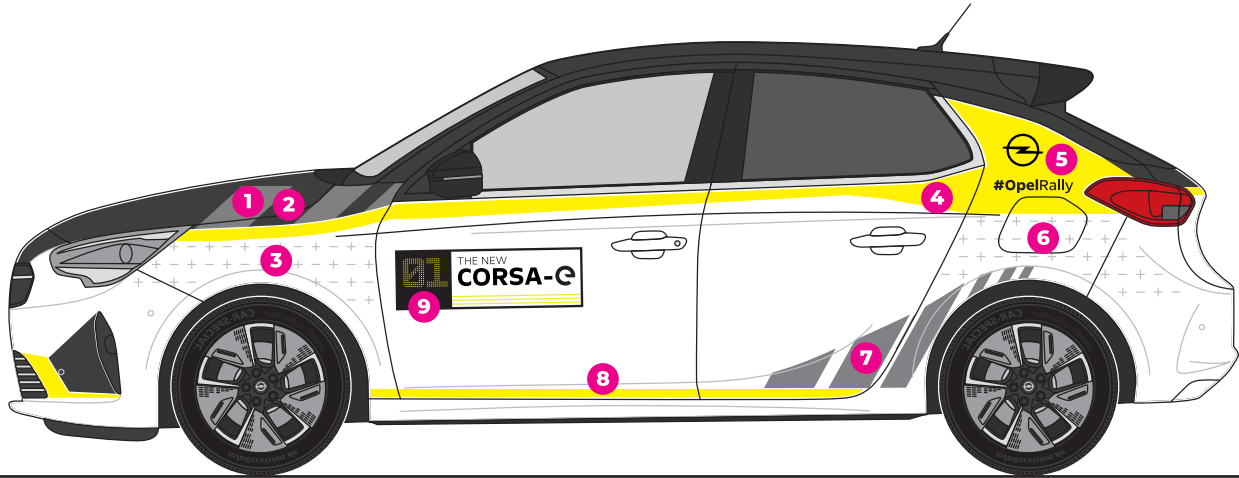

Searching for an installer?
 SIGNAL Design GmbH
 info@signal-design.de
 +49-791 97 47 47-11

20 21 22

Wrap hood, roof and pillars completely in black matte vinyl und tuck the corners. This step should be done by a professional installer.

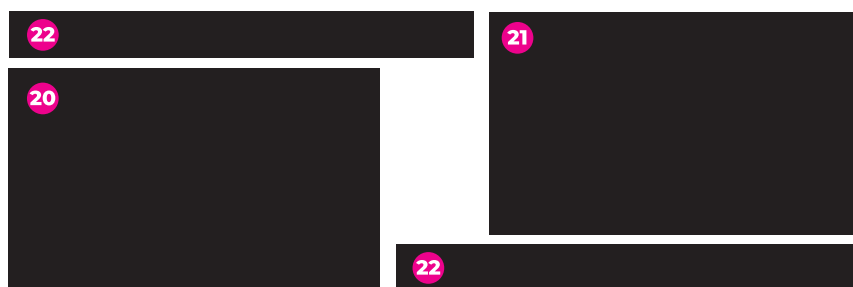


13

Apply black vinyl behind the licence plate.
Align upper edge to the vehicle.
Additional vinyl to cover the edge at the licence plate light.



4

Apply the yellow stripes wet with a 3 mm gap between the edges.

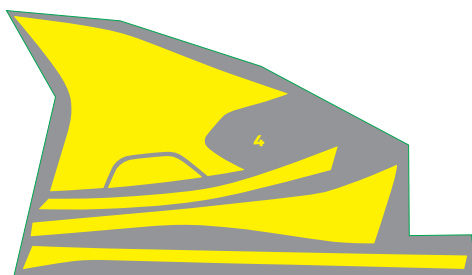

2

Apply black vinyl at the front fender with 3 mm parallel gap between yellow. The marked corner  is in the doorgap.




1

Apply grey stripes with 3mm gap to the hood.
The lower edge of the stripes should align to the edge of the black vinyl.




3

Position plus and minus with the help of reference points.

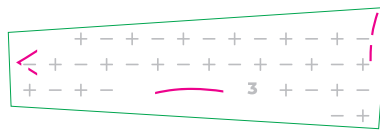


5

Position the logo with help of reference points. Reference points are placed on top of yellow.

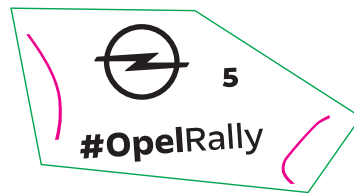

6

Position plus and minus with the help of reference points.

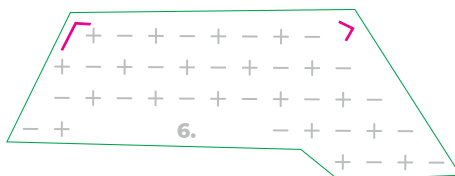


8

Apply the yellow stripes wet with a 3 mm gap between the edges.




7

Position grey stripes with help of **reference points**. Leave a 3 mm gap to the yellow stripe below and a 3 mm gap to the wheel arch. The top edge should follow the vehicle line.

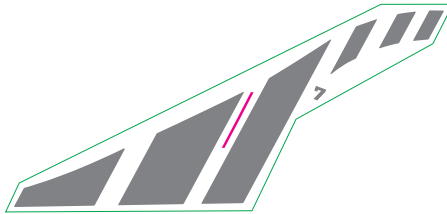


9

First position the black vinyl with help of **reference points** at the edges. Afterwards position the yellow vinyl with help of **reference points** on top of black vinyl.

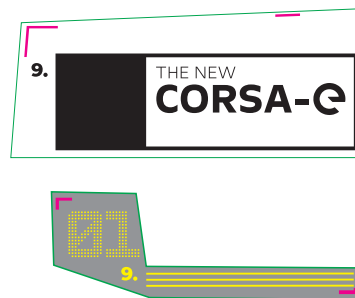

10

Position black vinyl with help of **reference points** at lower edge. Leave a 3 mm gap to yellow from the sides. Apply yellow stripes wet and position on top edge.

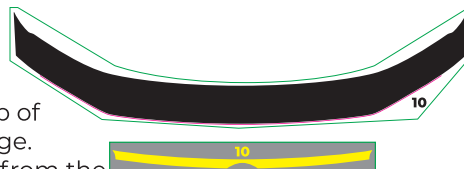


11

Position plus and minus with the help of **reference points** at the top and on the outside.



12


Position the lettering in the center with help of **reference points** below.

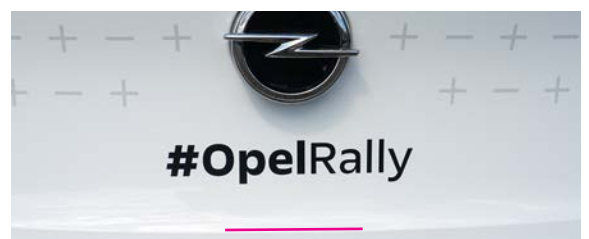

Align lower edge to the yellow stripe. Additional vinyl to cover the edge at the licence plate light.

14


Apply yellow stripes wet with 3 mm gap between edges at the lower and the inside edge. And position the lower corner aligned to the black edge. Position grey stripes with 3mm gap to yellow stripes within the same alignment.

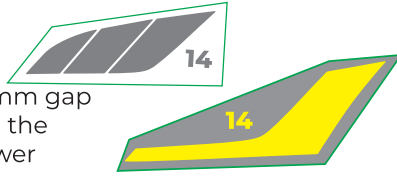

Only for sportversion GS line with different front and back bumper!


14S

Apply yellow stripes wet with 3 mm gap between edges at the lower and the inside edge. And position the lower corner aligned to the black edge. Position grey stripes with 3mm gap to yellow stripes within the same alignment.

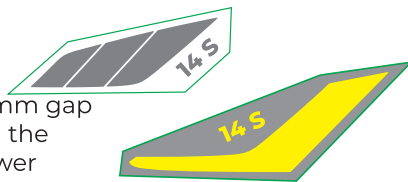


15

Position yellow „e“ on the hood with help of reference points on top.

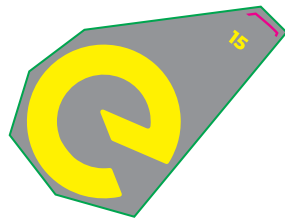

16

Position lettering on the hood with help of reference points on top.

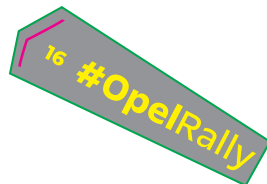

17

Position logo in the center of the roof. The distance to the front windscreen is 350 mm.



18



Apply yellow stripe wet and align „OPEL“ in the center.



Only for sportversion GS line with different front and back bumper!

18S




Apply yellow stripe wet and align „OPEL“ in the center.



19


Position black vinyl with help of **reference point** at the edge, all gaps are 3 mm.
Apply yellow stripe wet with a 3 mm gap to black vinyl and edges.

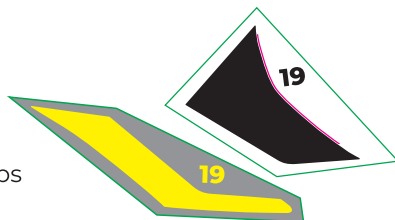

Only for sportversion GS line with different front and back bumper!

19S

Position black vinyl direct to edge. Apply yellow stripe wet with 3 mm gap to black vinyl and edges.

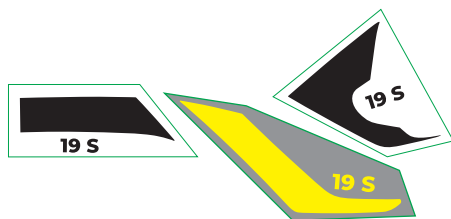

Do you search for an installer or have any questions?

SIGNAL Design GmbH | info@signal-design.de | +49-791 97 47 47-11